


CRAVAT-LOCK® NODAL MESH

Mesh	200/17/15	200/17/30	155/15/15	155/15/30	127/10/15	127/10/30
Number of horizontal wires	17	17	15	15	10	10
Height (cm)	200,00	200,00	155,00	155,00	127,00	127,00
Distance between vertical wires (cm)	15,00	30,00	15,00	30,00	15,00	30,00
Diameter of horizontal wires (mm)	2,50	2,50	2,50	2,50	2,50	2,50
Diameter of vertical wires (mm)	2,50	2,50	2,50	2,50	2,50	2,50
Material	Steel wire, galvanized (A class), (Zn=245g/m ²) in accordance with the standard: PN-EN 10244-2					

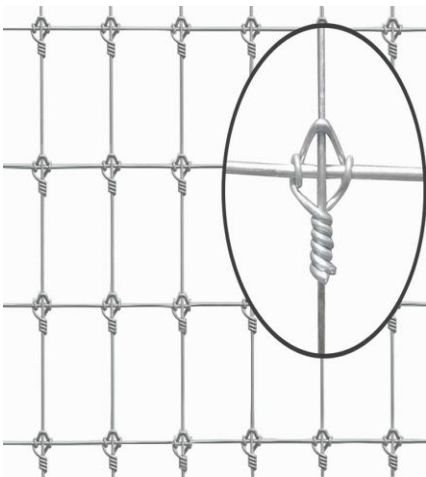

200/17/15 inch	200/17/30 inch	155/15/15 inch	155/15/30 inch	127/10/15 inch	127/10/30 inch
4x7	4x7	1x7	1x7	2x7	2x7
3x6	3x6	3x6	3x6	3x6	3x6
2x5	2x5	2x5	2x5	2x5	2x5
2x4	2x4	2x4	2x4	2x4	2x4
5x3	5x3	6x3	6x3		

- Cravat-Lock® is the strongest nodal mesh available on the market:
 - Vertical wire as a whole
 - The strongest non-shifting knot
 - High strength of horizontal wire Rm=1100-1300 MPa
- Mesh quality in accordance with European standard PN-EN 10223-5
- Configuration and distance between the horizontal wires is negotiable
- It is possible to produce a wire mesh with a smaller diameter